


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版发行 (INITIAL EDITION)	Guojiangang	Tanweixin	2012.04.23
B	---	变更结构	ZXM	DengMingXin	2013.11.11
B1	---	依实际生产变更图面	ZXM	DengMingXin	2013.10.23

NOTES:
 1. CURRENT RATING: 0.5A(2.3.4CONTACT)/1.8A(1.5CONTACT) MAX.
 2. VOLTAGE: 30 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 30 MILLIONHM MAX.
 5. DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC r.m.s
 6. INSULATION RESISTANCE: 100 MEGOHMS MIN

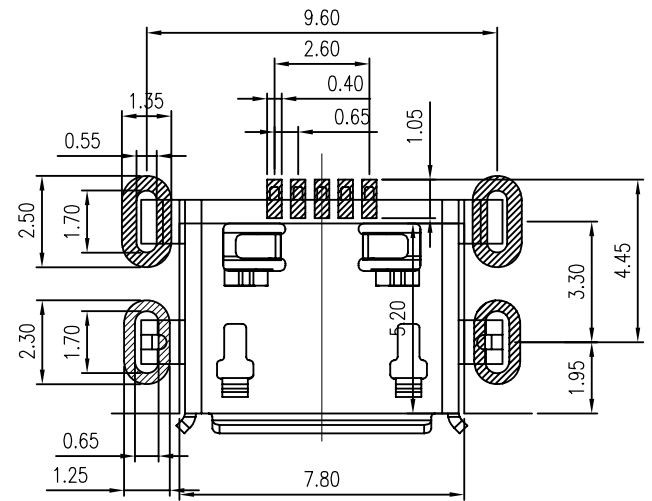

RECOMMENDED PCB LAYOUT(TOP VIEW)
 GENERAL TOLERANCES:±0.05

3	CONTACT	COPPER ALLOY T=0.15mm	Au/Ni Plated	1PCS
2	HOUSING	PA9T UL94V-0	BLACK	1SET
1	SHELL	STAINLESS STEEL T=0.30mm	MATTE TIN/Ni Plated	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		深圳市鑫南天科技有限公司
X.X	±0.30	X.*	± 2'	PART NO.
.XX	±0.20	.X*	± 1'	XNT-USB05CB080088
.XXX	±0.10	.XX*	±0.5'	TITLE: MICRO USB 5P 沉板0.8 四脚插板 四面翻边
UNITS	mm	APPD:	DRAWG NO. XNT-0101-0050	
MATERILA		CHED:		
FINISH		DRAW:		
			SCALE	SHEET
			1:1	1/1
			REV.	B1

新料号	旧料号
XNT-USB05CB080088	USB-1074-05CS